


FTR15-4080F



- Glass loaded paper cone with weather-resistant impregnation
- Airflow vented magnet assembly for dynamic heat dispersion

Frequency Response and Impedance Curves

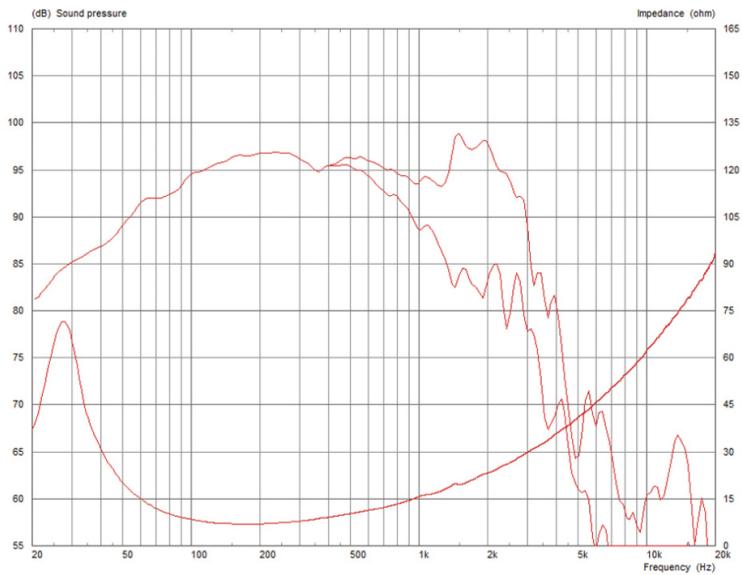

Topmost curve: Frequency response on axis | Secondary curve: Frequency response at 45° off axis

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2 anechoic environment.

Parameters: Measured after unit subjected to pre-conditioning signal.

$X_{max} = 0.5 \cdot (H_{vc} - H_g) + 0.25 \cdot H_g$

General Specifications

Nominal Diameter	381mm / 15in
Power Rating	600W
Continuous power rating	1200W
EIA power rating	800W
Rated impedance	8
Sensitivity	97dB
Frequency range	35-3000Hz
Chassis type	Cast aluminium
Magnet type	Ferrite
Magnet weight	3.1kg / 110oz
Voice coil diameter	100mm / 4in
Voice coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded paper (weather-resistant)
Surround material	Cloth-sealed
Suspension	Single
Xmax	8.5mm / 0.34in
Gap height (Hg)	10mm / 0.39in
VC winding height (Hvc)	22mm / 0.87in

Mounting Information

Overall diameter	385mm / 15.16in
Overall depth	170mm / 6.7in
Cut-out diameter	351mm / 13.82in
Mounting hole dimensions	10x7mm / 0.39x0.27in
Number of mounting holes	8
Mounting hole PCD	365-375mm / 14.37-14.76in
Unit weight	9.4kg / 20.7lb

Parameters

Sd	855.30cm ² / 132.57in ²
Fs	38.00Hz
Mms	111.70g / 3.94oz
Qms	2.855
Qes	0.273
Qts	0.249
Re	5.67
Vas	163.10l / 5.76ft ³
Bi	23.54Tm
Cms	0.16mm/N
Rms	9.34kg/s
Le (at 1kHz)	1.48mH
Xmax	8.5mm / 0.34in

Packed Dimensions & Weight

Single pack size W x D x H	435mm x 435mm x 200mm / 17.1in x 17.1in x 7.9in
Single pack weight	10.7kg / 23.6lb
Multi pack qty	36
Multi pack size W x D x H	1210mm x 1050mm x 980mm / 47.6in x 41.3in x 35.4in
Multi pack weight	375kg / 825lb